


- Integrated driver, easy installation
- Square front plate
- Non-Dimmable
- Little maintenances required
- Standard 75mm cut-hole
- Replace MR16 incandescent downlight
- Tiltable to adjust light direction
- 6500K Daylight CCT
- Lifetime of 15,000 hrs

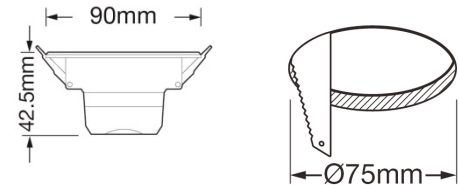

Order Code 65734

General Data

Filter Design Frosted PMMA

Geometric Data

Height (mm) 42.5mm (including LED driver)

Front plate (mm) 90mm x 90mm

Cut-hole (mm) 75mm circular

Weight (g) 69g

Electric Data

Wattage 4W

Voltage 220-240 V AC

Power Factor ≥ 0.40

Photometric Data

Luminous Flux (lm) 350

CRI Typ.80

CCT 6500 K – Daylight

Luminous Intensity (cd) 420


Beam Angle (°) 100°

Lifetime (L70) 15,000 hrs*

Replace

* LED Chips' lumen maintenance period under indoor 25°C environment.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

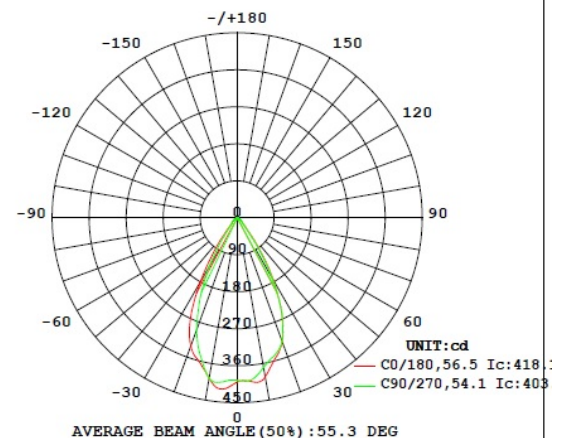



Order Code

65734

Product Description

Verbatim LED recessed tiltable downlight (square) 4W
6500K Daylight 220-240V 350LM (75/90mm)

Technical Packaging Details

Giftbox Barcode	6943760257342
Inner Carton Barcode	16943760257349
Outer Carton Barcode	26943760257346
Pack Dimensions (HxWxL)	105mm x 95mm x 55mm
Pack Weight	100g
Carton Qty (Shipping Unit)	30
Carton Dimensions (HxWxL)	545mm x 208mm x 185mm
Cartons/Layer	6
Layers/Pallet	4
Units/Pallet	720