

3-CCT LED Ceiling Light (Dimmable)

300mm IP54 18W 3000K/4000K/5700K 1750-1950lm dimmable

- 3-CCT (3000K/4000K/5700K) selectable
- 18W, 1750-1950lm
- Triac dimmable
- Slim design
- IP54 water proof for wet location installation
- 120° beam angle
- Lifetime 40,000 hrs



Order Code 65810

General Data

Lamp Socket	Integrated downlight
Design	PC diffuser

Geometric Data

Height (mm)	40mm
Diameter (mm)	300mm
Cut-hole (mm)	N/A
Weight (g)	1050g


Electric Data

Wattage	18W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz


Photometric Data

Total Luminous Flux (lm)	1750-1950lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	3000K/4000K/5700K
Luminous Intensity (cd)	700Cd (measured at 4000K)
Beam Angle (°)	120°
Lifetime	40,000 hrs

Equivalent to (W) N/A

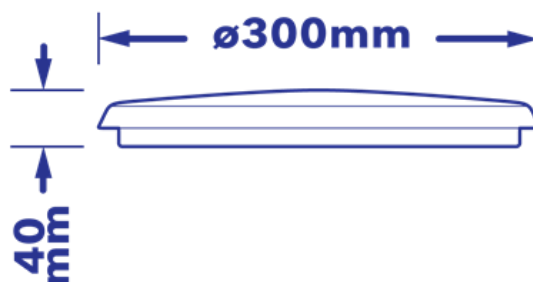

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

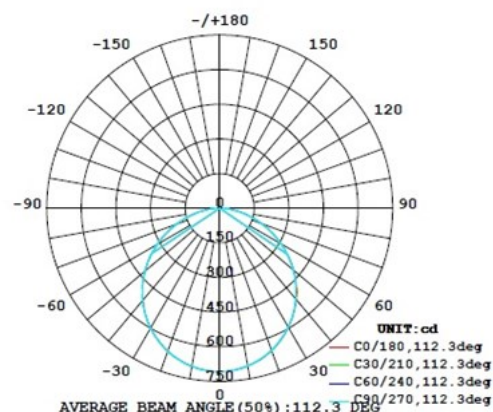

3-CCT LED Ceiling Light (Dimmable)

300mm IP54 18W 3000K/4000K/5700K 1750-1950lm dimmable

Order Code	65810
-------------------	-------

Product Description	Verbatim IP54 Slim LED ceiling light 18W 300mm 3-CCT selectable 1750-1950lm dimmable
----------------------------	---

Technical Packaging Details

Giftbox Barcode	4895117958100
-----------------	---------------

Inner Carton Barcode	
----------------------	--

Outer Carton Barcode	24895117958104
----------------------	----------------

Pack Dimensions (LxWxH)	310 mm x 310 mm x 50 mm
-------------------------	-------------------------

Pack Weight	1500g
-------------	-------

Carton Qty (Shipping Unit)	10
----------------------------	----

Carton Dimensions (LxWxH)	530mm x 320mm x335mm
---------------------------	----------------------

Cartons/Layer	2
---------------	---

Layers/Pallet	4
---------------	---

Units/Pallet	80
--------------	----