

# LED Integrated Recessed Downlight

24W 4000K Cool-white 2000lm (Φ200mm/Φ215mm)

- Easy Installation
- Non-dimmable
- No maintenance required
- Φ200mm Cutout size
- Ideal for replacing traditional CFL downlights



Order Code 66553

## General Data

Diffuser Type PS

## Geometric Data

Height (mm) 38mm including driver

Diameter (mm) Φ215mm

Cut-Hole (mm) Φ200mm

Weight (g) 250g

## Electric Data

Wattage 24W

Voltage 220-240V

Power Factor >0.5

Operating Frequency 50/60Hz

## Photometric Data

Total Luminous Flux (lm) 2000 lm

CRI >80


CCT 4000K – Cool-white

Luminous Intensity (cd) 700 Cd


Beam Angle (°) 110°

Lifetime(L70) 15000 hrs

Operating Temperature -20-40°C



Light Distribution Curve [Unit:cd]

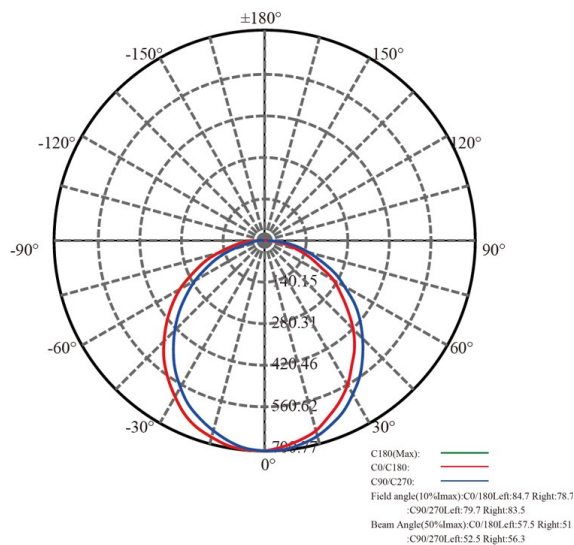

# LED Integrated Recessed Downlight

24W 4000K Cool-white 2000lm (Φ200mm/Φ215mm)



## Order Code

66553

## Product Description

LED recessed downlight 24W 4000K CW 2000lm 220-240V  
(200/215mm) open wire

## Technical Packaging Details

|                            |                |
|----------------------------|----------------|
| Giftbox Barcode            | 4895117965535  |
| Inner Carton Barcode       | N/A            |
| Outer Carton Barcode       | 24895117965539 |
| Pack Dimensions (LxWxH)    | 218x45x220mm   |
| Pack Weight                | TBC            |
| Carton Qty (Shipping Unit) | 20             |
| Carton Dimensions (LxWxH)  | 450x245x462mm  |
| Cartons/Layer              | 10             |
| Layers/Pallet              | 2              |
| Units/Pallet               | 400            |