

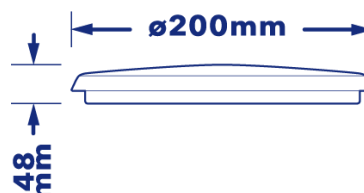



- 3-CCT (3000K/4000K/5700K) selectable
- 12W 1090-1230lm
- Triac dimmable
- Slim design
- 120° beam angle
- Lifetime 40000 hrs



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Order Code	66698
General Data	
Lamp Socket	N/A
Design	FROSTED PC
Geometric Data	
Height (mm)	48mm
Diameter (mm)	Φ200mm
Cut Hole (mm)	N/A
Weight (g)	420g
Electric Data	
Wattage	12W
Voltage	200-240Vac
Power Factor	0.9
Operating Frequency	50Hz
Photometric Data	
Total Luminous Flux (lm)	1090-1230lm
CRI	>80
CCT	3000K/4000K/5700K – 3-CCT
Luminous Intensity (cd)	N/A
Beam Angle (°)	120°
Lifetime(L70)	>40000 hrs
Operating Temperature	-20 ~ 45°C





Order Code	66698
Product Description	Slim LED Ceiling Light 12W 3-CCT Selectable 200MM 1090-1230lm Dim

Technical Packaging Details

Giftbox Barcode	4895117966983
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117966987
Pack Dimensions (LxWxH)	210X55X210mm
Pack Weight	510g
Carton Qty (Shipping Unit)	20
Carton Dimensions (LxWxH)	580x435x230mm
Cartons/Layer	4
Layers/Pallet	4
Units/Pallet	320