


- Power consumption :200W
- Total luminous flux : Max. 30000lm
- 90° beam angle
- Dimmable - step dimming (100%, 80%, 60%)
- 3-CCT selectable
- -25 to 45 °C operating temperature
- IP65 waterproof
- IK06 impact protection
- L70 LED Lifetime ~ 72000 hrs



Order Code 67048

Geometric Data

Height (mm)	155 mm
Diameter (mm)	316 mm
Weight (g)	1965 g


Electric Data

Wattage	200W
Voltage	100-240V
Power Factor	0.9
Operating Frequency	50/60 Hz

Photometric Data

Total Luminous Flux (lm)	Max. 30000lm
CRI	≥80
CCT	3000K/4000K/6500K – 3-CCT
Luminous Intensity (cd)	15491
Beam Angle (°)	90°
No. of LED Chips	N/A
Equivalent to (W)	N/A

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

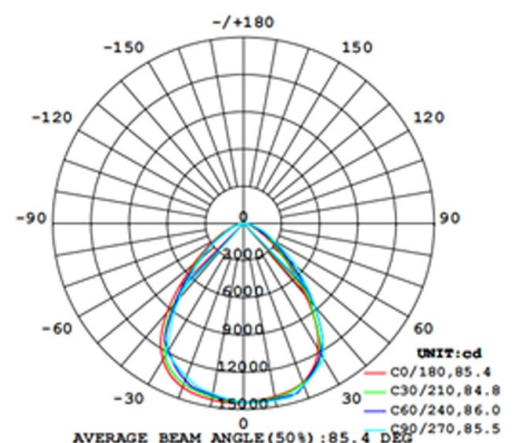



IP65 UFO highbay

200W 3000K/4000K/6500K 3-CCT 30000lm
Dimmable



Order Code	67048
Product Description	LED UFO Highbay 120W/160W/200W 3CCT 320mm 18000-30000lm IP65

Technical Packaging Details	
Giftbox Barcode	4895117970485
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117970489
Pack Dimensions (LxWxH)	322x322x130 mm
Pack Weight	10000g
Carton Qty (Shipping Unit)	4
Carton Dimensions (LxWxH)	662x285x334 mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC

Accessories:
(Optional; Sold Separately)

Sensor	Remote	Bracket
PN# 67049	PN# 67050	PN# 67051