



- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- Outdoor use only
- IP65 water-proof
- IK07 impact proof
- 100° beam angle
- 3000K CCT Warm-white
- Lifetime of 15,000 hrs



Order Code	65456
General Data	
Lamp Socket	Integrated Fixture
Design	PC diffuser
Geometric Data	
Length (mm)	220mm
Width (mm)	167mm
Weight (g)	638g
Electric Data	
Wattage	30 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	2300
CRI	≥80
CCT	3000 K – Warm White
Luminous Intensity (cd)	1050Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

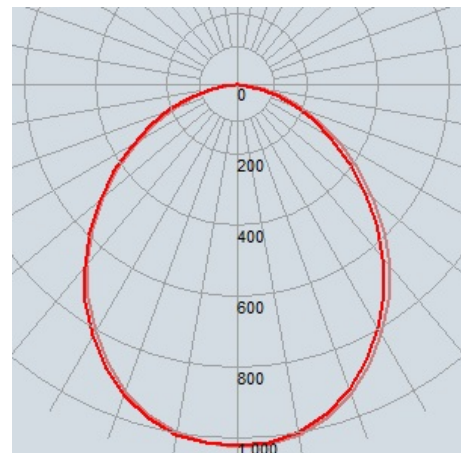

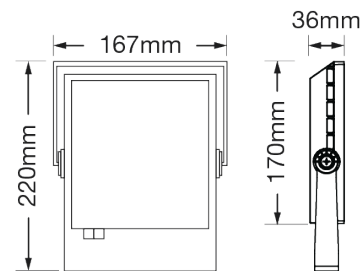

Order Code	65456
Product Description	Verbatim LED Floodlight 30W 2300lm 3000K Warm White 220-240V

Technical Packaging Details

Giftbox Barcode	6943760254563
Inner Carton Barcode	16943760254560
Outer Carton Barcode	26943760254567
Pack Dimensions (LxWxH)	226mm x 171mm x 47mm
Pack Weight	720g
Carton Qty (Shipping Unit)	12
Carton Dimensions (LxWxH)	348mm x 229mm x 233mm
Cartons/Layer	9
Layers/Pallet	3
Units/Pallet	324