



- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- Outdoor use only
- IP65 water-proof
- IK07 impact proof
- 100° beam angle
- 3000K CCT Warm-white
- Lifetime of 15,000 hrs



Order Code	65458
General Data	
Lamp Socket	Integrated Fixture
Design	PC diffuser
Geometric Data	
Length (mm)	301mm
Width (mm)	220mm
Weight (g)	1008g
Electric Data	
Wattage	50 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	3600
CRI	≥80
CCT	3000 K – Warm White
Luminous Intensity (cd)	1600Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

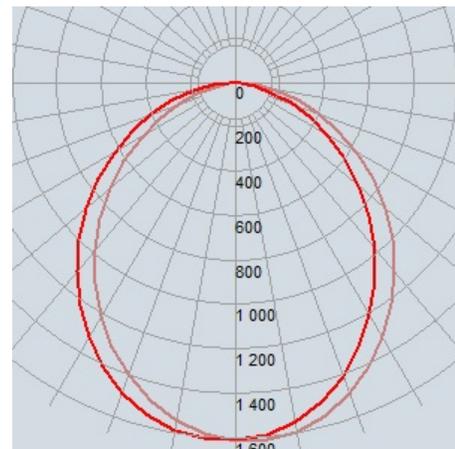

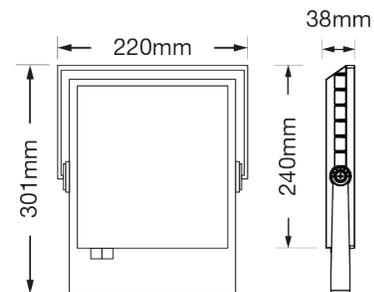

Order Code	65458
Product Description	Verbatim LED Floodlight 50W 3600lm 3000K Warm White 220-240V

Technical Packaging Details

Giftbox Barcode	6943760254587
Inner Carton Barcode	16943760254584
Outer Carton Barcode	26943760254581
Pack Dimensions (LxWxH)	308mm x 226mm x 50mm
Pack Weight	1150g
Carton Qty (Shipping Unit)	6
Carton Dimensions (LxWxH)	317mm x 230mm x 315mm
Cartons/Layer	14
Layers/Pallet	2
Units/Pallet	168