



- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- Outdoor use only
- IP65 water-proof
- IK07 impact proof
- 100° beam angle
- 6500K CCT Warm-white
- Lifetime of 15,000 hrs



Order Code	65459
General Data	
Lamp Socket	Integrated Fixture
Design	PC diffuser
Geometric Data	
Length (mm)	301mm
Width (mm)	220mm
Weight (g)	1008g
Electric Data	
Wattage	50 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	3850
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	1600Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

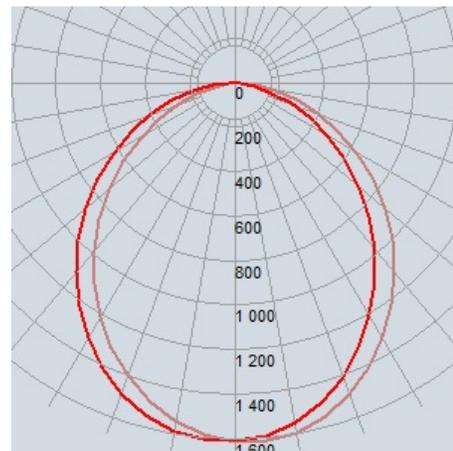

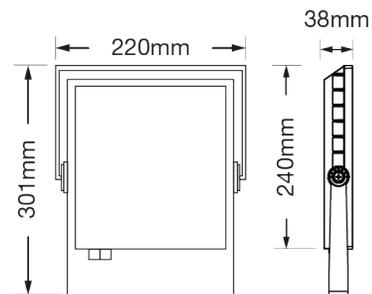

Order Code	65459
Product Description	Verbatim LED Floodlight 50W 3850lm 6500K Daylight 220-240V

Technical Packaging Details	
Giftbox Barcode	6943760254594
Inner Carton Barcode	16943760254591
Outer Carton Barcode	26943760254598
Pack Dimensions (LxWxH)	308mm x 226mm x 50mm
Pack Weight	1150g
Carton Qty (Shipping Unit)	6
Carton Dimensions (LxWxH)	317mm x 230mm x 315mm
Cartons/Layer	14
Layers/Pallet	2
Units/Pallet	168