

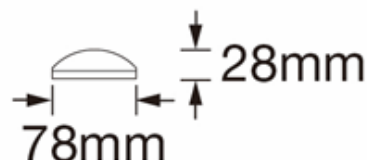


- IP65 rated for outdoor installation, suitable for outdoor installation
- 3000K CCT
- Slim design, only 28mm thick
- Easy Installation
- Dedicated power cord outlet and power cord outlet stopper provided
- Wide input voltage range, 100-277V
- Long lifespan and little maintenances required
- More than 50% power saving compared to fluorescent tube
- Operating temperature -20°C to 45°C
- Lifetime of 40,000 hrs

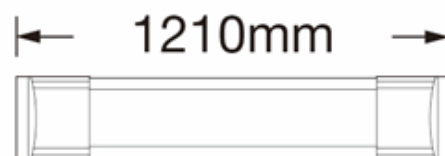

Polar intensity diagram

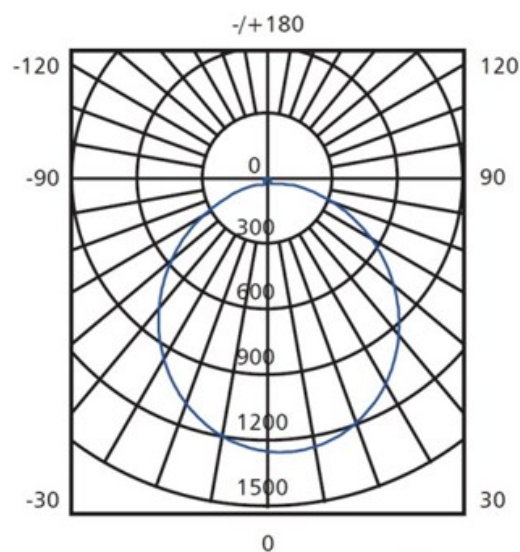

UNIT: cd
AVERAGE BEAM ANGLE(50%): 108.6 DEG

Order Code 65491

General Data

Design PC diffuser

Geometric Data

Height (mm) 1210mm

Diameter (mm) 78mm

Cut-hole (mm) 28mm

Weight (g) 770g

Electric Data

Wattage 42W

Voltage 100-277 V AC

Power Factor ≥ 0.9

Operating Frequency 50/60 Hz

Photometric Data

Total Luminous Flux (lm) 3500lm

90° cone Luminous Flux (lm) N/A

CRI ≥ 80

CCT 3000K – warm white

Luminous Intensity (cd) 1260Cd

Beam Angle (°) 110°

Lifetime 40,000 hrs

Equivalent to (W)

N/A



**Order Code**

65491

Product Description

Verbatim LED IP65 Outdoor Linear Batten 42W 1200mm
3000K 3500lm

Technical Packaging Details

Giftbox Barcode	4895117954911
Inner Carton Barcode	
Outer Carton Barcode	24895117954915
Pack Dimensions (LxWxH)	1238mmx86.5mmx40mm
Pack Weight	1000g
Carton Qty (Shipping Unit)	25
Carton Dimensions (LxWxH)	1290mmx480mmx250mm
Cartons/Layer	2
Layers/Pallet	3
Units/Pallet	150