


3-CCT LED Ceiling Light (Dimmable)

400mm IP54 30W 3000K/4000K/5700K 2760-3000lm dimmable

- 3-CCT (3000K/4000K/5700K) selectable
- 30W, 2760-3000lm
- Triac dimmable
- Slim design
- IP54 water proof for wet location installation
- 120° beam angle
- Lifetime 40,000 hrs



Order Code 65933

General Data

Lamp Socket	Integrated downlight
Design	PC diffuser

Geometric Data

Height (mm)	52mm
Diameter (mm)	400mm
Cut-hole (mm)	N/A
Weight (g)	1400g



Electric Data

Wattage	30W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz

Photometric Data

Total Luminous Flux (lm)	2760-3000lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	3000K/4000K/5700K
Luminous Intensity (cd)	1100Cd (measured at 4000K)
Beam Angle (°)	120°
Lifetime	40,000 hrs

Equivalent to (W) N/A

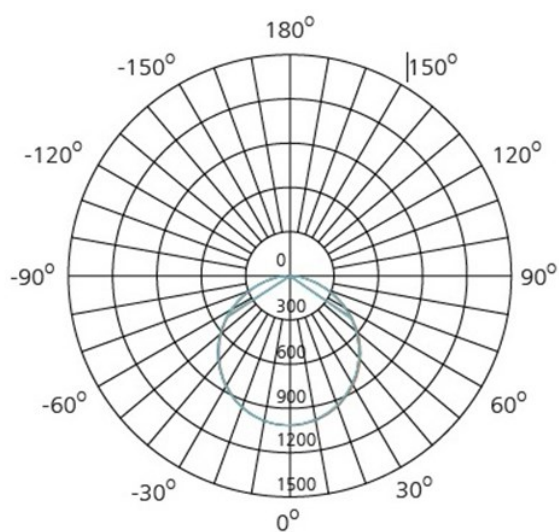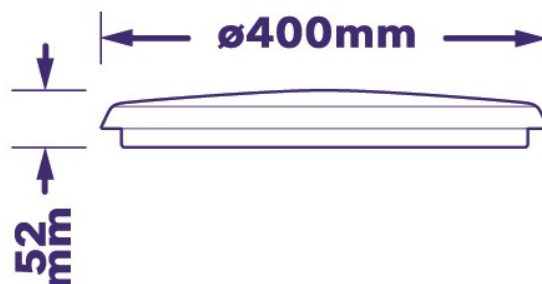

AVERAGE BEAM ANGLE (50%): 112.4DEG



3-CCT LED Ceiling Light (Dimmable)

400mm IP54 30W 3000K/4000K/5700K 2760-3000lm dimmable

Order Code	65933
-------------------	-------

Product Description	Verbatim IP54 Slim LED ceiling light 30W 400mm 3-CCT selectable 2760-3000lm dimmable
----------------------------	---

Technical Packaging Details

Giftbox Barcode	4895117959336
-----------------	---------------

Inner Carton Barcode	
----------------------	--

Outer Carton Barcode	24895117959330
----------------------	----------------

Pack Dimensions (LxWxH)	410 mm x 410 mm x 60 mm
-------------------------	-------------------------

Pack Weight	1900g
-------------	-------

Carton Qty (Shipping Unit)	10
----------------------------	----

Carton Dimensions (LxWxH)	880mm x 480mm x 330mm
---------------------------	-----------------------

Cartons/Layer	TBC
---------------	-----

Layers/Pallet	TBC
---------------	-----

Units/Pallet	TBC
--------------	-----