

- High quality diffuser for uniform light distribution
- High efficacy, 90lm/W
- Flicker-free
- Lifetime of 50000hrs
- 3000K/4000K/5700K 3-CCT selectable
- 90° beam angle; UGR19,
- Surface mount and suspended installation accessories available



Order Code 66655

General Data

Lamp base N/A
Design N/A

Geometric Data





Length (mm) 1195mm
Width x Height (mm) 295x 32mm
Weight (g) 1720g

Electric Data

Wattage 36W
Voltage 220-240Vac
Power Factor 0.9
Operating Frequency 50/60Hz

Photometric Data

Total Luminous Flux (lm) 3240-3600lm
CRI >80
CCT 3000K/4000K/5700K – 3-CCT
Luminous Intensity (cd) N/A
Beam Angle (°) 90°
Lifetime(L70) >50000 hrs
Operating Temperature -10 ~ 40°C

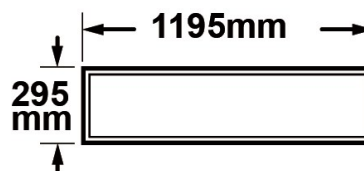



Order Code	66655
Product Description	LED backlit panel 36W 3CCT 1195x295mm UGR19 flicker free

Technical Packaging Details

Giftbox Barcode	4895117966556
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117966550
Pack Dimensions (LxWxH)	1248x52x355mm
Pack Weight	1970g
Carton Qty (Shipping Unit)	5
Carton Dimensions (LxWxH)	1270x310x380mm
Cartons/Layer	6
Layers/Pallet	1
Units/Pallet	30

Accessories: (Separately sold)

LED Driver 36W
1-10V Dimmable



PN# 66658

Suspended
installation kit (4pcs)



PN# 66660

Recessed clips
(4pcs)



PN# 66662