

- High quality diffuser for uniform light distribution
- High efficacy, 90lm/W
- Flicker-free
- Lifetime of 50000hrs
- 3000K/4000K/5700K 3-CCT selectable
- 90° beam angle; UGR19,
- Surface mount and suspended installation accessories available



Order Code 66656

General Data

Lamp base N/A

Design N/A

Geometric Data

Length (mm) 595mm

Width x Height (mm) 595x 32mm

Weight (g) 1560g

Electric Data

Wattage 36W

Voltage 220-240Vac

Power Factor 0.9

Operating Frequency 50/60Hz

Photometric Data

Total Luminous Flux (lm) 3240-3600lm

CRI >80





CCT 3000K/4000K/5700K – 3-CCT

Luminous Intensity (cd) N/A

Beam Angle (°) 90°

Lifetime(L70) >50000 hrs

Operating Temperature -10 ~ 40°C

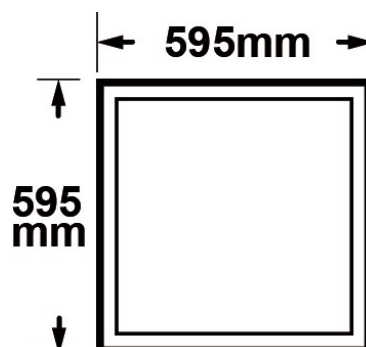



Order Code	66656
Product Description	LED backlit panel 36W 3CCT 595x595mm UGR19 flicker free

Technical Packaging Details

Giftbox Barcode	4895117966563
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117966567
Pack Dimensions (LxWxH)	648x52x655mm
Pack Weight	2160g
Carton Qty (Shipping Unit)	5
Carton Dimensions (LxWxH)	670x300x680mm
Cartons/Layer	6
Layers/Pallet	2
Units/Pallet	60

Accessories: (Separately sold)

LED Driver 36W
1-10V Dimmable



PN# 66658

Suspended
installation kit (4pcs)



PN# 66660

Recessed clips
(4pcs)



PN# 66662