

- High quality diffuser for uniform light distribution
- High efficacy, 90lm/W
- Flicker-free
- Lifetime of 50000hrs
- 3000K/4000K/5700K 3-CCT selectable
- 90° beam angle; UGR19,
- Surface mount and suspended installation accessories available



Order Code 66657

General Data

Lamp base N/A

Design N/A

Geometric Data

Length (mm) 1195mm

Width x Height (mm) 595x32mm

Weight (g) 3200g

Electric Data

Wattage 60W

Voltage 220-240Vac

Power Factor 0.9

Operating Frequency 50/60Hz

Photometric Data

Total Luminous Flux (lm) 5400-6000lm

CRI >80





CCT 3000K/4000K/5700K – 3-CCT

Luminous Intensity (cd) N/A

Beam Angle (°) 90°

Lifetime(L70) >50000 hrs

Operating Temperature -10 ~ 40°C

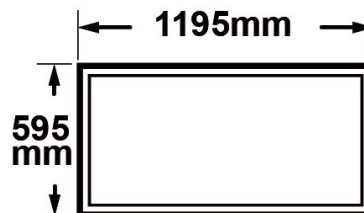



Order Code	66657
Product Description	LED backlit panel 60W 3CCT 1195x595mm UGR19 flicker free

Technical Packaging Details

Giftbox Barcode	4895117966570
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117966574
Pack Dimensions (LxWxH)	1248x52x655mm
Pack Weight	3950g
Carton Qty (Shipping Unit)	4
Carton Dimensions (LxWxH)	1270x220x290mm
Cartons/Layer	8
Layers/Pallet	1
Units/Pallet	32

Accessories: (Separately sold)

LED Driver 60W
1-10V Dimmable



PN# 66659

Suspended
installation kit (6pcs)



PN# 66661

Recessed clips
(6pcs)



PN# 66663