



- Perfect for replacing traditional 36W 1200mm T8 fluorescent tube
- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- Single end power supply
- Shatter proof
- 50% power saving over T8 fluorescent tube
- 100lm/W
- LED starter included as a set
- UV- and IR-free light for less heat and protection for heat sensitive objects



Order Code	66208
General Data	
Lamp Socket	G13
Design	Double sheath shatter proof diffuser , Plastic over glass
Geometric Data	
Length (mm)	1198mm
Diameter (mm)	25mm
Weight (g)	184g
Electric Data	
Wattage	18 W
Voltage	100-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	1800
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	360Cd
Beam Angle (°)	220°
Lifetime	20,000 hrs
Equivalent to (W)	36 W

Light Distribution Chart

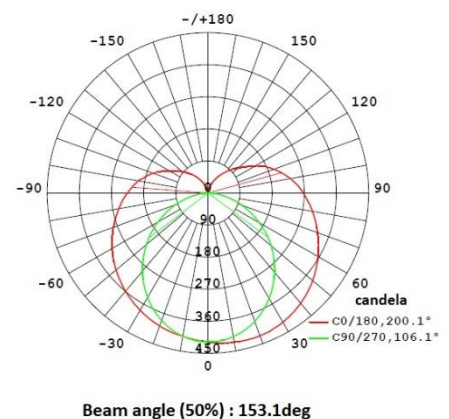



Order Code	66208
Product Description	Verbatim LED CCG T8 18W 1200mm 1800lm 100-240V 6500K Daylight with LED starter (PF0.9 PC Cap Protective sleeve over glass)

Technical Packaging Details

Giftbox Barcode	4895117962084
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117962088
Pack Dimensions (LxWxH)	1285mm x 30mm x 30mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	25
Carton Dimensions (LxWxH)	TBC
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC